

# SeaBridge series

Modern-Post Top



## Overview

The Seabridge series offers a complete package of sizes, optical systems and mounting options designed for urban areas, buildings, roads and public areas.

## Features

- High efficiency LED's / Driver
- Cast aluminum / Bronze
- Stainless Steel hardware
- Silicone gasket

## Specifications

- 40 watts
- 2800 Lm
- 2700K, 3000K, 4000K
- Symmetric / Asymmetric



SBL4-26-ANG-FG-BZC-PT



SBL4-26-ANG-FG-BZC-PT



SBM2-23-ANG-FA-PT

# SeaBridge series

Project: \_\_\_\_\_ Type: \_\_\_\_\_ Date: \_\_\_\_\_

Product: \_\_\_\_\_

Ordering Information:	Product	Optics	Wattage	LED	Voltage	Mounting	Color	Options
Example:	SBL4-23-ANG-	OA	- 40	- 4k	- 120	- WM	- BLK	- HS

## SeaBridge Med/Lrg • Post Top, Arm Mount or Wall Mount

Product - Shade	Optics	EPA: 1.5	Weight: 22 lbs
SBM2-23 ANG Angle	FA Frosted Acrylic Lens		
SBM4-23	GLV Glare Louvers		
SBL2-26	IND5 Type-5 Reflector		
SBL4-26	GR3 Glass Refractor Type-3		
	GR5 Glass Refractor Type-5		

Wattage	Lm	Voltage
36	2850	120-277

**Note:** Driver's are 120v- 277v unless specified. LED's included. Consult factory for other voltages & drivers.


**Mounting** Note: For pole and arm information, see pole & arm section

Post Top	Flush Mount	Wall Mount	Arm Mount
PT	FM	WM	(2/3/4)AM
Post Top for 2 3/8 O.D. tenon or <b>Specify Size</b>	Flush Mount for 4" O.D. pole only		Arm Mount-Specify the number of arms required


Colors	Options
BLK Black	SF Single Fuse (120,277,347v)
WHT White	DF Double Fuse (208,240,480v)
DBZ Dark Bronze	C Copper Shade
LG Light Gray	SS Stainless Steel Shade
CC Custom Color	PCB Photo Control Button
	HS House Side Shield
	ULS Upper Lens Shield
	BZC Bronze Castings
	PM Pendant Mounting

Note: for Copper shades add a "C" in back of the shade prefix example - CFLR

## Luminaire Dimensions



## Optics

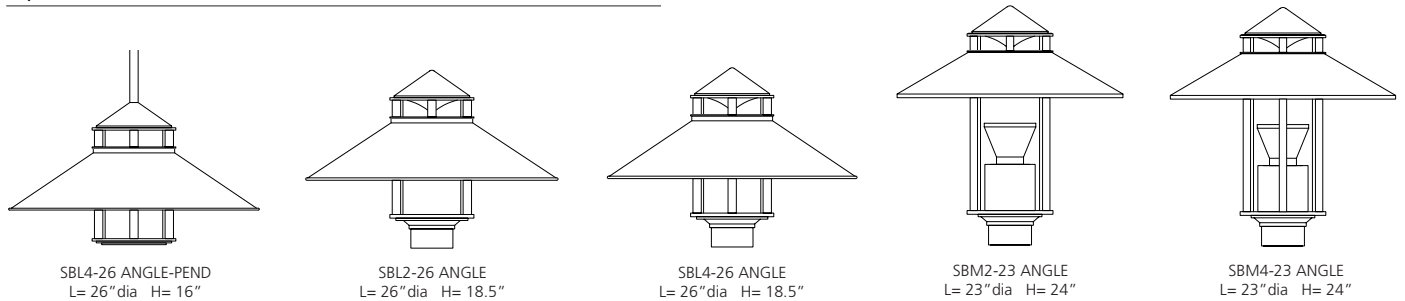

## Specifications

**HOUSING:** The fixture shall be composed of cast aluminum, A356 alloy and extruded aluminum components, free of porosity and foreign materials. The top cover removable for access to the LED compartment, sealed with silicone gasket. The shade shall be a heavy gage spun aluminum with a down edge for added rigidity. The struts shall be of extruded aluminum. The LED's & driver assembly is accessible by loosening two bolts and lifting off the body assembly. All internal and external hardware shall be 316 stainless steel. The configuration above can be obtain in bronze, copper and stainless steel components.

**ENCLOSURE:** The lens shall be of one piece seamless clear acrylic-(standard), sealed to the housing with a molded silicone gasket on the top and bottom. The glass refractor made of borosilicate glass, type 3 and 5. The upper cone reflector and the indirect reflector shall be specular spun aluminum.

**LEDS:** Selected high brightness LED's, > 80 CRI. 2700°K-3000°K-4000°K color temperature (nominal). Distribution symmetric and asymmetric. Expected life minimum 60,000 hours @80% IL- depending upon the ambient temperature of the installation location. Independent led modules. Wattages 40 max.

**ELECTRICAL:** All electrical components are U.L. and C.S.A. recognized, mounted on a gear tray which attaches to the housing as a one piece assembly. LED driver, constant current electronic driver-rated for 40w, 120v-277v input -30°C start. 0-10v dimming and surge protection. All components are prewired and electronically tested before shipment.

**MOUNTING:** Post top mounting-the fixture shall slip over a 4" O.D. pole or tenon and be secured with 4-stainless steel set screws. Other mounting options available.

**FINISH:** Super TGIC thermoset polyester powder coat paint. Powder coating is 2.5 mil nominal thickness over a chromated pretreatment. This finish system shall meet the A.S.T.M. 2500 hour salt spray test. Copper and Bronze to be of a natural finish. A clear coat option is available for copper components.

**CERTIFICATION:** Fixture shall be listed with ETL outdoor wet location use, conforms to UL1598 and CAN/CSA Std C22.2 no. 250.0

**WARRANTY:** Fixture shall be warranted to be free of defects for three years. LED's and driver components shall carry the manufacturer's limited warranty. Our products are 100% designed, sourced and fabricated in California USA.